


Core Data Sheet

Part Number: G51A-87

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 9.65	(max)	10.30
ID (mm) 4.78	(min)	4.13
HT (mm) 3.96	(max)	4.61

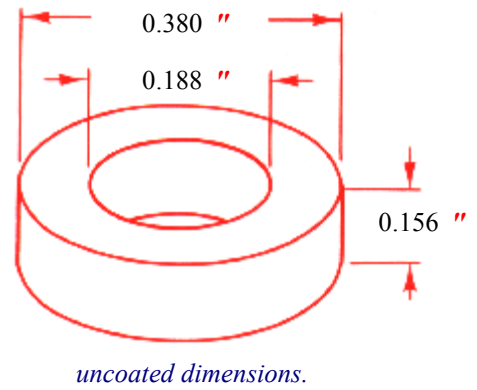

Physical Characteristics:

Winding area (cm ²)	0.14	Strength (N) typ.	68.2
Surface area (cm ²)	4.16	Weight (grams) typ.	1.66
Coating	Epoxy, Light Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	87		
Initial Permeability (μi)	160	tol +/-	13
Description	High Flux - gas atomized 80 /20 nickel-iron alloy powder		

Electrical Data:

AL norm (nH)	84.00	
AL max. (nH)	90.72	
AL min. (nH)	77.28	
DC bias at 0.8μi (Oe) typ.	20	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	600	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

Magnetic Dimensions:

C1 (mm-1)	2.3820
Le (mm)	20.9
Ae (mm ²)	8.8
Ve (mm ³)	183.5

Special Comments

- 1.
2. AL band is +/- 12% for DuraFlux
- 3.

Note: the right to change specification data as required without notice is reserved.