


Core Data Sheet

Part Number: G64- 86

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 6.60	(max)	7.25
ID (mm) 2.67	(min)	2.02
HT (mm) 4.78	(max)	5.43

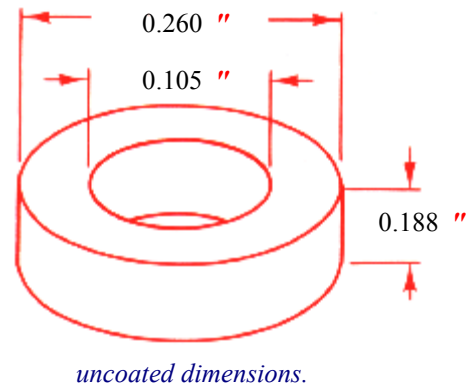

Physical Characteristics:

Winding area (cm ²)	0.04	Strength (N) typ.	64.7
Surface area (cm ²)	2.28	Weight (grams) typ.	1.03
Coating	Epoxy, Light Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	86		
Initial Permeability (μi)	147	tol +/-	12
Description	High Flux - gas atomized 80 /20 nickel-iron alloy powder		

Electrical Data:

AL norm (nH)	122.00	
AL max. (nH)	134.20	
AL min. (nH)	109.80	
DC bias at 0.8μi (Oe) typ.	24	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	600	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

Magnetic Dimensions:

C1 (mm-1)	1.5051
Le (mm)	12.7
Ae (mm ²)	8.5
Ve (mm ³)	108.0

Special Comments

- 1.
2. AL band is +/- 10% for MPP & High Flux
- 3.

Note: the right to change specification data as required without notice is reserved.