


# Core Data Sheet

**Part Number: G64B- 83**

**Core Dimensions:**

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 6.60	(max)	7.25
ID (mm) 2.67	(min)	2.02
HT (mm) 2.54	(max)	3.19

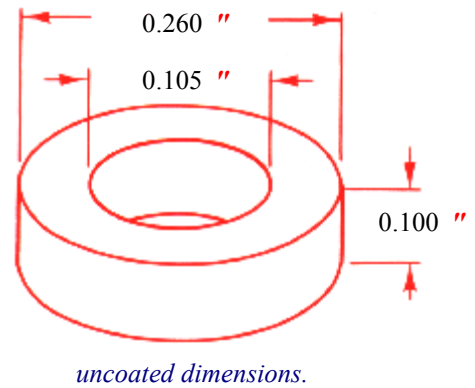

**Physical Characteristics:**

Winding area (cm <sup>2</sup> )	0.04	Strength (N) typ.	40.0
Surface area (cm <sup>2</sup> )	1.77	Weight (grams) typ.	0.49
Coating	Epoxy, Light Blue, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

**Material:**

Grade	83		
Initial Permeability (μi)	60	tol +/-	5
Description	High Flux - gas atomized 80 /20 nickel-iron alloy powder		

**Electrical Data:**

AL norm (nH)	26.00	
AL max. (nH)	28.60	
AL min. (nH)	23.40	
DC bias at 0.8μi (Oe) typ.	78	
Power Losses (mW/cm <sup>3</sup> ) typ. 50kHz, 1000gauss	645	
Total Losses (ohms/H/μi) typ. < 20gauss	0.0	

**Magnetic Dimensions:**

C1 (mm-1)	2.9261
Le (mm)	12.7
Ae (mm <sup>2</sup> )	4.4
Ve (mm <sup>3</sup> )	55.5

**Special Comments**

- 1.
2. AL band is +/- 10% for MPP & High Flux
- 3.

*Note: the right to change specification data as required without notice is reserved.*