


Core Data Sheet

Part Number: G22 - 96

Core Dimensions:

Uncoated (tol. +/-0.25)	After coating	
OD (mm) 6.35	(max)	7.00
ID (mm) 2.79	(min)	2.14
HT (mm) 2.79	(max)	3.44

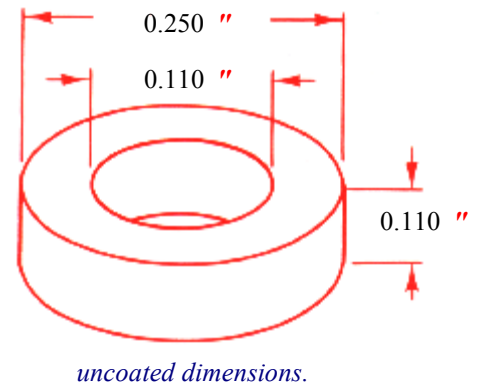

Physical Characteristics:

Winding area (cm ²)	0.04	Strength (N) typ.	40.0
Surface area (cm ²)	1.76	Weight (grams) typ.	0.56
Coating	Epoxy, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

Material:

Grade	96		
Initial Permeability (μi)	147	tol +/-	12
Description	MPP - gas atomized 80 /20 nickel-iron alloy powder.		

Electrical Data:

AL norm (nH)	59.00	
AL max. (nH)	64.90	
AL min. (nH)	53.10	
DC bias at 0.8μi (Oe) typ.	22	
Power Losses (mW/cm ³) typ. 50kHz, 1000gauss	400	
Total Losses (ohms/H/μi) typ. < 20gauss	0.2	

Magnetic Dimensions:

C1 (mm-1)	2.8789
Le (mm)	12.9
Ae (mm ²)	4.5
Ve (mm ³)	57.4

Special Comments

2. AL band is +/- 10% for MPP & High Flux
3. AL band is +/- 12% for DuraFlux

Note: the right to change specification data as required without notice is reserved.