


# Core Data Sheet

**Part Number: G60-95**

**Core Dimensions:**

Uncoated (tol. +/-0.25)		After coating	
OD (mm)	12.70	(max)	13.35
ID (mm)	7.62	(min)	6.97
HT (mm)	4.75	(max)	5.40

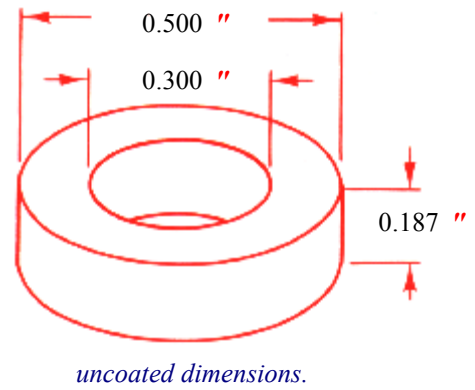

**Physical Characteristics:**

Winding area (cm <sup>2</sup> )	0.40	Strength (N) typ.	87.0
Surface area (cm <sup>2</sup> )	7.59	Weight (grams) typ.	3.00
Coating	Epoxy, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

**Material:**

Grade	95		
Initial Permeability (μi)	125	tol +/-	10
Description	MPP - gas atomized 80 /20 nickel-iron alloy powder.		

**Electrical Data:**

AL norm (nH)	56.00		
AL max. (nH)	60.48		
AL min. (nH)	51.52		
DC bias at 0.8μi (Oe) typ.	25		
Power Losses (mW/cm <sup>3</sup> ) typ. 50kHz, 1000gauss	400		
Total Losses (ohms/H/μi) typ. < 20gauss	0.2		

**Magnetic Dimensions:**

C1 (mm-1)	2.6940
Le (mm)	30.6
Ae (mm <sup>2</sup> )	11.3
Ve (mm <sup>3</sup> )	346.9

**Special Comments**

- 1.
- 2.
- 3.

*Note: the right to change specification data as required without notice is reserved.*

