


# Core Data Sheet

**Part Number: G64B-98**

**Core Dimensions:**

Uncoated (tol. +/-0.25)		After coating	
OD (mm)	6.60	(max)	7.25
ID (mm)	2.67	(min)	2.02
HT (mm)	2.54	(max)	3.19

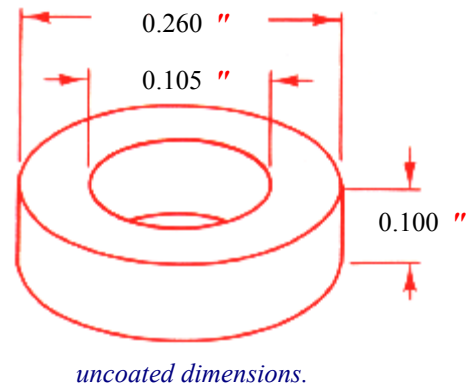

**Physical Characteristics:**

Winding area (cm <sup>2</sup> )	0.04	Strength (N) typ.	40.0
Surface area (cm <sup>2</sup> )	1.77	Weight (grams) typ.	0.59
Coating	Epoxy, 0.2 mm approx. per surface. Voltage breakdown 500Vac.		
Packing	Not available.		

**Material:**

Grade	98		
Initial Permeability (μi)	173	tol +/-	12
Description	MPP - gas atomized 80 /20 nickel-iron alloy powder.		

**Electrical Data:**

AL norm (nH)	75.00		
AL max. (nH)	82.50		
AL min. (nH)	67.50		
DC bias at 0.8μi (Oe) typ.	18		
Power Losses (mW/cm <sup>3</sup> ) typ. 50kHz, 1000gauss		400	
Total Losses (ohms/H/μi) typ. < 20gauss		0.2	

**Magnetic Dimensions:**

C1 (mm-1)	2.9261
Le (mm)	12.7
Ae (mm <sup>2</sup> )	4.4
Ve (mm <sup>3</sup> )	55.5

**Special Comments**

- 1.
2. AL band is +/- 10% for MPP & High Flux
- 3.

*Note: the right to change specification data as required without notice is reserved.*

